

SIP-GW3CM

Analogue Telephone Adaptor

Multi-point IP adaptor for residential and small to medium sized business applications



GW3CM is a next generation IP adaptor accommodating up to 3 SIP user accounts. This convenient all-in-one adaptor facilitates PC, analogue phone and fax over the internet through a single compact device.

SIP-GW3CM

Network Protocol

SIP v1(RFC2543), v2(RFC3261)
IP/TCP/UDP/RTP/RTCP/SDP
IP/ICMP/ARP/RARP/SNTP
TFTP Client/DHCP Client/PPPoE Client
Telnet/HTTP Server
DNS Client
NAT/DHCP Server
ToS field
T.38:fax over IP

Voice Feature

G.711, G.723.1/ILBC, G.726
G.729A, G.729B
VAD, CNG, LEC
Packet Loss Compensation
Adaptive Jitter Buffer

SIP Server

Registrar Server: 3 SIP account
Outbound Proxy

Configuration

Web Browser
Console/Telnet
Keypad
Auto-Provision

Firmware Upgrade

TFTP
Console
HTTP
Auto-Provision

Call Function

Call Hold
Call Waiting
Call Transfer
Call Forward
Caller ID
3-way conference

Phone Function

Volume Adjustment
TBR (time break recall)
40-2560 Milliseconds
Speed dial key
Phone Book
Redial
Flash

Dial Method

Direct IP call without SIP proxy
Dial number via SIP server
Dial URL via SIP Server

DTMF Function

In-Band DTMF
Out-of-Band DTMF
SIP Info

IP Assignment

Static IP
DHCP
PPPoE

NAT Traversal

STUN
UPnP

Security

HTTP 1.1 basic/digest
authentication for Web setup
MD5 for SIP authentication
(RFC 2069/RFC 2617)

Physical Features


Interface:2xRJ45 10/100M Base-T
1xFXS port, 1xPSTN lifeline
Power adaptor: Input:AC 100~240V
Output: DC 12V/0.5A
Product: 225 x 144 x 63 mm
Weight: 0.45 Kg
Operating humidity:10~95%
LED:Status,PSTN,VoIP
Storage temperature: Up to 60 C

Package Features

TBC

Certifications

WEEE

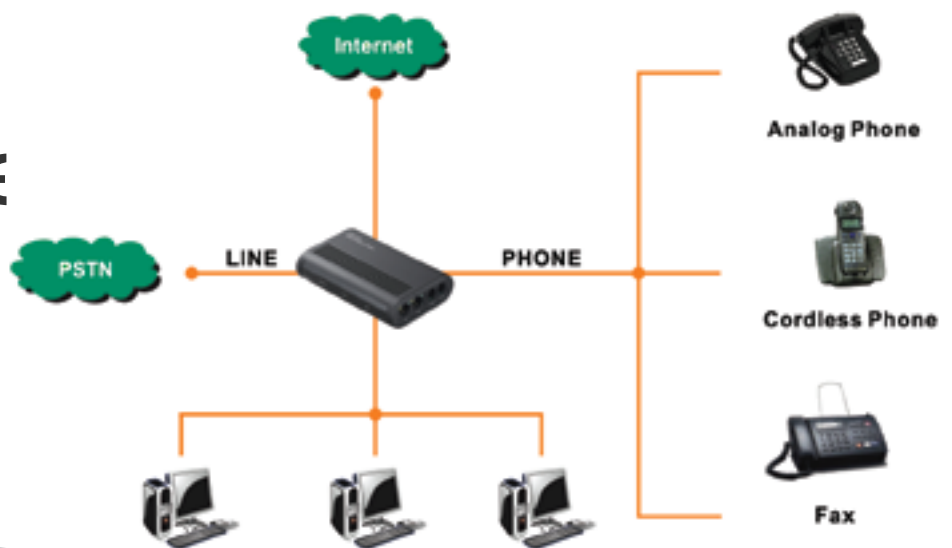

Yealink
EASY VoIP